

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 996 118 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.04.2000 Bulletin 2000/17

(51) Int. Cl.⁷: G11B 7/007, G11B 7/013

(21) Application number: 99121065.9

(22) Date of filing: 21.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 23.10.1998 JP 30196598

(71) Applicant: Pioneer Corporation
Meguro-ku, Tokyo (JP)

(72) Inventors:
• Muramatsu, Eiji,
c/o Tokorozawa Koujou, Pioneer Corp
Tokorozawa-shi, Saitama-ken 359-0047 (JP)

• Kato, Masahiro,
c/o Tokorozawa Koujou, Pioneer Corp
Tokorozawa-shi, Saitama-ken 359-0047 (JP)
• Sato, Makoto,
c/o Sougoukenkyusho, Pioneer Corpor.
Tsurugashima-shi, Saitama-ken 350-2201 (JP)

(74) Representative:
Sajda, Wolf E., Dipl.-Phys. et al
MEISSNER, BOLTE & PARTNER
Postfach 86 06 24
81633 München (DE)

(54) Recording medium and a recording system for the recording medium

(57) A recording medium has a circular substrate (4), grooves (1) formed in the substrate (4), lands (2) formed between the grooves (1), a plurality of land pre-pits (3) formed between the grooves (1). The respective grooves (1) and the land pre-pits (2) are formed so as to satisfy particular relationships between the width of the groove (1), the length of the land pre-pit (3) in a radial direction of the substrate (4), the wave length of light used in a system for recording information on the recording medium, and the numerical aperture of an objective (8) in the system for accurate recording and reproduction.

FIG.1 a


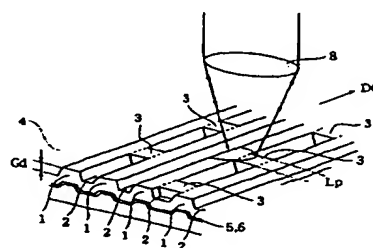


FIG.1 b



Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a recording medium and a recording and reproducing system for the recording medium.

[0002] Heretofore, there is known the DVD (digital versatile disc), the DVD-R (DVD WRITE ONCE) and the DVD-RW (DVD-ReWritable) as the rewritable disc.

[0003] As shown in the Japanese Patent Laid-Open Publication No. 9-17029, the DVD-R or DVD-RW (hereinafter called DVD) has a spiral or co-axial groove for recording information, a land between the grooves and a plurality of land preprints formed between the grooves. The land preprint is provided with various sets of information such as the address.

[0004] In such a disc, it is possible to read the information recorded on the groove and the information recorded on the land preprint at the same time.

[0005] However, there is a problem that signals reproduced from the information recorded on land preprints affect the RF signal reproduced from the information recorded on the groove as offset.

SUMMARY OF THE INVENTION

[0006] An object of the present invention is to provide a recording medium wherein information recorded on the groove and the land preprint can be accurately read out and a system capable of recording and reproducing with accuracy.

[0007] According to the present invention, there is provided a recording medium having a circular substrate, grooves formed on the substrate, a land formed between the grooves, a plurality of land preprints formed between the grooves, wherein the groove and the land preprint are formed so as to satisfy a following formula,

$$Gw/(\lambda/NA) = 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332,$$

where Gw is the width of the groove, Lp is the length of the land preprint in a radial direction of the substrate, Gd is the depth of the groove, λ is the wave length of light used in a system for recording information on the recording medium, and NA is the numerical aperture of an objective in the system.

[0008] The present invention further provides a recording medium having a circular substrate, grooves formed on the substrate, a land formed between the grooves, a plurality of land preprints formed between the grooves, wherein the groove and the land preprint are formed so as to satisfy following formulae;

$$Gw/(\lambda/NA) \geq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 - (-2.64Gd + 0.1276)$$

$$Gw/(\lambda/NA) \leq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 + (-4.48Gd + 0.2112),$$

where Gw is the width of the groove, Lp is the length of the land preprint in a radial direction of the substrate, Gd is the depth of the groove, λ is the wave length of light used in a system for recording information on the recording medium, and NA is the numerical aperture of an objective in the system.

[0009] The present invention still further provides a system of recording a medium having a circular substrate, grooves formed on the substrate, a land formed between the grooves, a plurality of land preprints formed between the grooves, wherein a wavelength of light for recording information on the medium and a numerical aperture of an objective of the system are provided so as to satisfy following formulae,

$$Gw/(\lambda/NA) \geq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 - (-2.64Gd + 0.1276)$$

$$Gw/(\lambda/NA) \leq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 + (-4.48Gd + 0.2112)$$

where Gw is the width of the groove, Lp is the length of the land preprint in a radial direction of the substrate, Gd is the depth of the groove.

BRIEF DESCRIPTION OF DRAWINGS

[0010]

Fig. 1a is a perspective view of an optical DVD for explaining the present invention;

Fig. 1b is a sectional view of the disc of Fig. 1a;

Fig. 2a is an enlarged plan view showing a part of the disc;

Fig. 2b is a block diagram of a reproducing system;

Fig. 3a through 3c are graphs showing waveforms of a land prepit detection signal and an RE signal;

Fig. 4a through 4c are graphs showing waveforms of a land prepit detection signal and an RF signal detected from recorded mediums; and

Figs. 5 through 13 are graphs for determining optimum conditions for the land prepit are the groove of the medium.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0011] Referring to Figs. 1a and 1b, the DVD has a transparent plastic substrate 4 made of polycarbonate. On the substrate 4, there is formed grooves 1 arranged in the circumferential direction DC, lands 2 between the grooves 1, and land prepits 3 on the land 2 formed at predetermined intervals.

[0012] Information such as video data or audio data is recorded in the groove, and information such as address is recorded in the prepit.

[0013] On the underside of the substrate 4, there is formed a recording layer 5 of organic coloring matter or inorganic metal, a reflection layer 6 and a protecting layer 7. The laser light is applied to the groove passing through an objective 8.

[0014] In accordance with the present invention, the width Gw of the groove 1, the length Lp of the land prepit in the circumferential direction, and the depth Gd of the groove are determined to particular values as described hereinafter.

[0015] Referring to Fig. 1 showing a part of the DVD and Fig. 2b showing a reproducing system for the DVD, a light spot SP has a diameter larger than the width Gw of the groove 1 and disposed so that the center of the spot coincides with the center line of the groove 1. Thus, information recorded on the land prepit 3 can also be read as shown in Fig. 2a.

[0016] The reproducing system has a photodetector 9 comprising four elements 9A, 9B, 9C and 9D for receiving the light reflected from the disc, and adding and subtracting circuits 10 and 11 and an adder 12. The spot of the reflected light is positioned such that the center of the spot coincides with the center of the photodetector 9.

[0017] Here, the areas A and D in Fig. 2a read the information on the groove 1, and areas B and C read information on the groove 1 and land prepit 3. The photodetector 9 produces signals A, B, C and D corresponding to the areas A-D.

[0018] The adding and subtracting circuit 10 produces a land prepit signal $SLp = (A+D) - (B+C)$, the adding and subtracting circuit 11 produces a tracking error signal $STE = (A+D) - (B+C)$, and the adder 12 produces an RF signal $SRF = A+B+C+D$.

[0019] Figs. 3a, 3b, 3c show results of reproduction experiments of the DVD-RW, where amplitude change of the land prepit signal SLp and the RF signal SRF under the condition that the wavelength λ of the spot SP and the numerical aperture NA are constant.

[0020] In the experiment of Fig. 3a, the prepit length Lp is 0.3 μm and the groove width Gw is 0.25 μm , in Fig. 3b the prepit length Lp is 0.3 μm , the groove width Gw is 0.3 μm , and in Fig. 3c Lp = 0.3 μm , Gw = 0.4 μm .

[0021] From the graphs, it will be understood that the voltage amplitudes of the signals SLp and SRF at the irradiation time t change with the prepit length Lp and the groove width Gw.

[0022] Figs. 4a, 4b and 4c show results of experiments of the DVD-RW in which information is recorded in the groove. The conditions are the same as those of Figs. 3a-3c.

[0023] From the graphs, it will be understood that the voltage amplitudes of the signals SLp and SRF at the irradiation time change with the prepit length Lp and the groove width Gw.

[0024] In accordance with the present invention, the groove width Gw, the prepit length Lp and the groove depth Gp are determined to optimum values as follows.

[0025] The groove width Gw, prepit length Lp, groove depth Gd, numerical aperture NA and wavelength λ are determined so that the ratio $Gw/(\lambda/NA)$ of the groove width Gw to spot diameter λ/NA is set to satisfy both of following formulae (1) and (2). The ratio λ/NA of the wavelength λ to the numerical aperture NA indicates a diameter d of spot SP.

$$Gw/(\lambda/NA) \cong 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 - (-2.64Gd+0.1276) \quad (1)$$

$$Gw/(\lambda/NA) \cong 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 + (-4.48Gd+0.2112) \quad (2)$$

[0026] An optimum design of the DVD can be obtained by satisfying the above conditions. Namely, it is possible to detect the RF signal SRE and prepit signal SLp with high accuracy, even if the spot irradiates the groove and prepit.

[0027] The formulae (1) and (2) are verified with reference to Figs. 5 through 13.

[0028] Figs. 5-8 show results of experiments wherein detection accuracy of the land prepit signal SRF changes with the groove width Gw, prepit length Lp, groove depth Gd, wavelength λ and numerical aperture NA.

[0029] In the graph, the abscissa is the ratio $Gw/(\lambda/NA)$ of diameter λ/NA to the groove width Gw , and the ordinate is the ratio LPP level/offset of the voltage amplitude of the land prepit signal SLp (LPP level) to the offset level (offset) of the RF signal SRF. In addition, the groove depth Gd and the prepit length Lp are changed.

[0030] The offset level (offset) is a parameter obtained by standardizing the alternating current component of the RF signal SRF of Figs. 3a-3c with the direct current component of the signal SRF, and the voltage amplitude (LPP level) is a parameter obtained by standardizing the land prepit signal SLp with the direct current component of the RF signal SRF.

[0031] If the alternating current of the RF signal SRF is expressed by SRF (AC), the offset level (offset) is expressed by the following formula (3), voltage amplitude (LPP level) is expressed by the formula (4), and the ratio (LPP level/offset) is expressed by the formula (5).

$$\text{offset} = (\text{SRF}(\text{AC})/\text{SRF}) \quad (3)$$

$$\text{LPP level} = (\text{SLP}/\text{SRF}) \quad (4)$$

$$\text{LPP level/offset} = (\text{SLP}/\text{SRF}(\text{AC})) \quad (5)$$

[0032] In Figs. 5-8, the groove depth Gd is changed between $20 \mu\text{m} - 35 \mu\text{m}$ by $5 \mu\text{m}$. In Fig. 5, $Lp/(\lambda/NA) = 0.128$, $Lp/(\lambda/NA) = 0.2515$ in Fig. 6, 0.3815 in Fig. 7, 0.505 in Fig. 8.

[0033] It is confirmed that the optimum design in the condition when the value of LPP level/offset indicating the detecting accuracy of the land prepit detection signal SLp and RF signal SRF is about 10, namely LPP level/offset ≈ 10 .

[0034] Figs. 9-12 show the relationship between $Lp/(\lambda/NA)$ and $Gw/(\lambda/NA)$ with the parameter of the groove depth Gd .

[0035] The line Gwo in Figs. 9-12 is a line obtained by plotting points where the value of LPP level/offset in Figs. 5-8 becomes maximum, and the line $G+$ and line $G-$ are lines obtained by plotting points where LPP level/offset becomes about 10. Further, the line $G+$ is the case where LPP level/offset becomes 10 in the right side of Figs. 5-8, the line $G-$ is the case where LPP level/offset becomes 10 in the left side of Figs. 5-8.

[0036] Therefore, it is understood that the ranges $Gw+$ and $Gw-$ between the lines $G+$ and $G-$ is the optimum design conditions. The line Gwo does not largely change, it can be expressed by the following formula (6).

$$Gw/(\lambda/NA) = 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342Lp/(\lambda/NA) + 0.332 \quad (6)$$

[0037] The formula (6) shows the most optimum condition. The lines $G+$ and $G-$ is approximately equal to lines formed by parallelly moving the line Gwo .

[0038] Fig. 13 shows the relationship between the groove depth Gd and $Gw+/(\lambda/NA)$ and the relationship between the groove depth Gd and $Gw-/(\lambda/NA)$ in which the parallel moving quantities are set to the ranges $Gw+$ and $Gw-$. The range between the lines $Gw+$ and $Gw-$ is the optimum design condition. The lines $Gw+$ and $Gw-$ in Fig. 13 are expressed by following formulae (7) and (8)

$$Gw/(\lambda/NA) = -4.48Gd + 0.2112 \quad (7)$$

$$Gw/(\lambda/NA) = -2.64Gd + 0.1276 \quad (8)$$

[0039] The above described formulae (1) and (2) are obtained by obtaining the range between the lines $Gw+$ and $Gw-$.

[0040] In accordance with the present invention, the groove width, groove depth and the prepit length are set to values based on optimum conditions for preventing the land prepit from affecting the detected RF signal. And, in accordance with the present invention, the wavelength of laser light and the numeral aperture are set to values based on optimum conditions; also. Therefore, it is possible to detect information recorded on the groove and the land prepit with accuracy.

[0041] While the invention has been described in conjunction with preferred specific embodiment thereof, it will be understood that this description is intended to illustrate and not limit the scope of the invention.

Claims

1. A recording medium having a circular substrate (4), grooves (1) formed in the substrate (4), lands (2) formed between the grooves (1); a plurality of land prepits (3) formed between the grooves (1), wherein the respective grooves (1) and the land prepits (3) are formed so as to satisfy the following formula:

$$Gw / (\lambda/NA) = 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332,$$

wherein

Gw is the width of the groove (1),

Lp is the length of the land prepit (3) in a radial direction of the substrate (4),

λ is the wave length of light used in a system for recording information on the recording medium, and NA is the numerical aperture of an objective (8) in the system.

2. A recording medium having a circular substrate (4), grooves (1) formed in the substrate, lands (2) formed between the grooves (1), a plurality of land prepits (3) formed between the grooves (1), wherein the respective grooves (1) and the land prepits (3) are formed so as to satisfy the following formulae:

$$Gw/(\lambda/NA) \geq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332 - (-2.64 Gd + 0.1276)$$

$$Gw/(\lambda/NA) \leq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332 + (-4.48 Gd + 0.2112)$$

wherein

Gw is the width of the groove (1),

Lp is the length of the land prepit (3) in a radial direction of the substrate (4),

Gd is the depth of the groove (1),

λ is a wave length of light used in a system for recording information on the recording medium, and NA is the numerical aperture of an objective (8) in the system.

3. A system of recording information on a recording medium having a circular substrate (4), grooves (1) formed in the substrate (4), lands (2) formed between the grooves (1), a plurality of land prepits (3) formed between the grooves (1), wherein the wave length (λ) of light for recording information on the medium and the numerical aperture (NA) of an objective (8) of the system are provided so as to satisfy the following formula:

$$Gw / (\lambda/NA) = 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332,$$

wherein

Gw is the width of the groove (1),

Lp is the length of the land prepit (3) in a radial direction of the substrate (4).

4. A system of recording information on a recording medium having a circular substrate (4), grooves (1) formed in the substrate (4), lands (2) formed between the grooves (1), a plurality of land prepits (3) formed between the grooves (1), wherein the wave length (λ) of light for recording information on the medium and the numerical aperture (NA) of an objective (8) of the system are provided so as to satisfy the following formulae:

$$Gw/(\lambda/NA) \geq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332 - (-2.64 Gd + 0.1276)$$

$$Gw/(\lambda/NA) \leq 0.2093 \{Lp/(\lambda/NA)\}^2 - 0.4342 Lp/(\lambda/NA) + 0.332 + (-4.48 Gd + 0.2112)$$

wherein

Gw is the width of the groove (1),

Lp is the length of the land prepit (3) in a radial direction of the substrate (4), and

Gd is the depth of the groove (1).

FIG.1 a

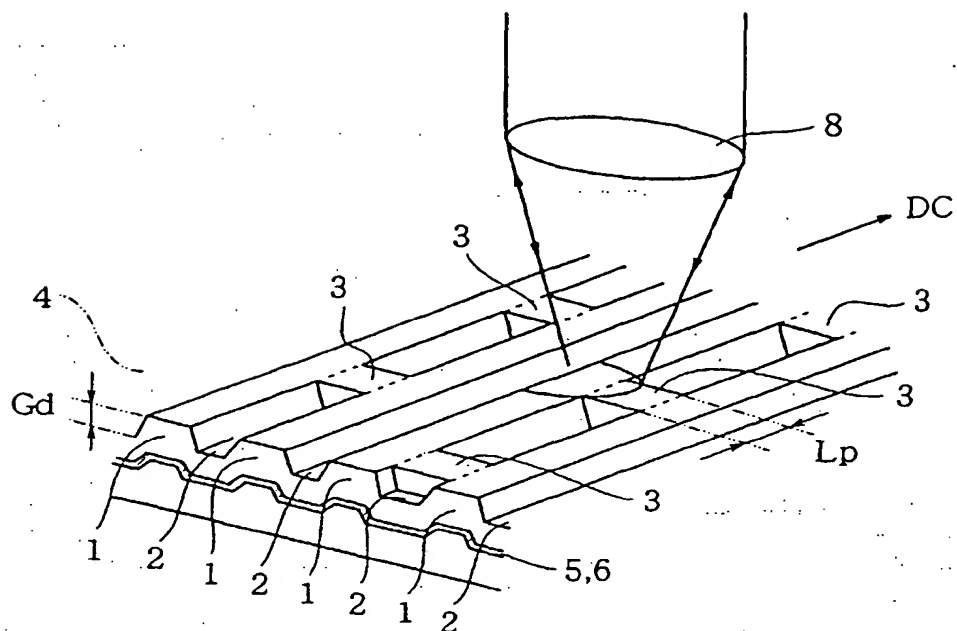


FIG.1 b

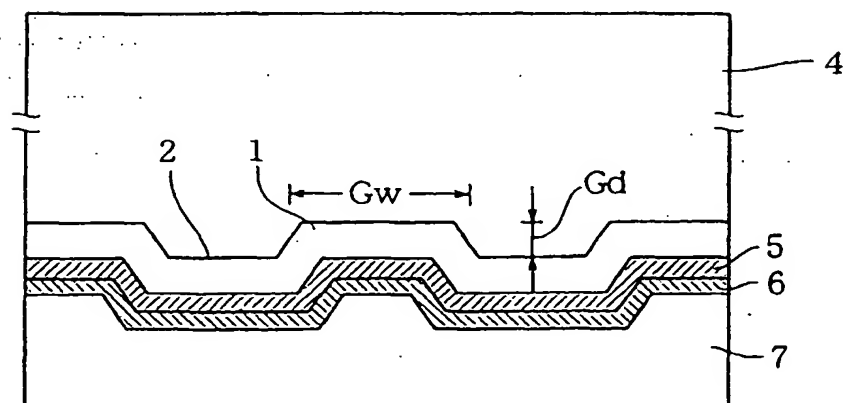


FIG.2 a

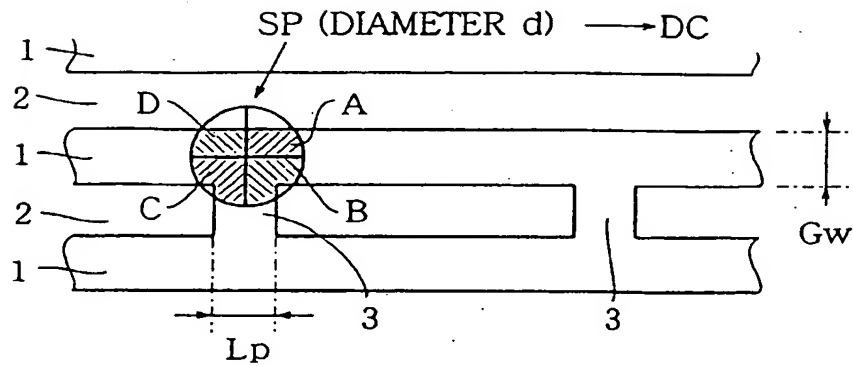


FIG.2 b

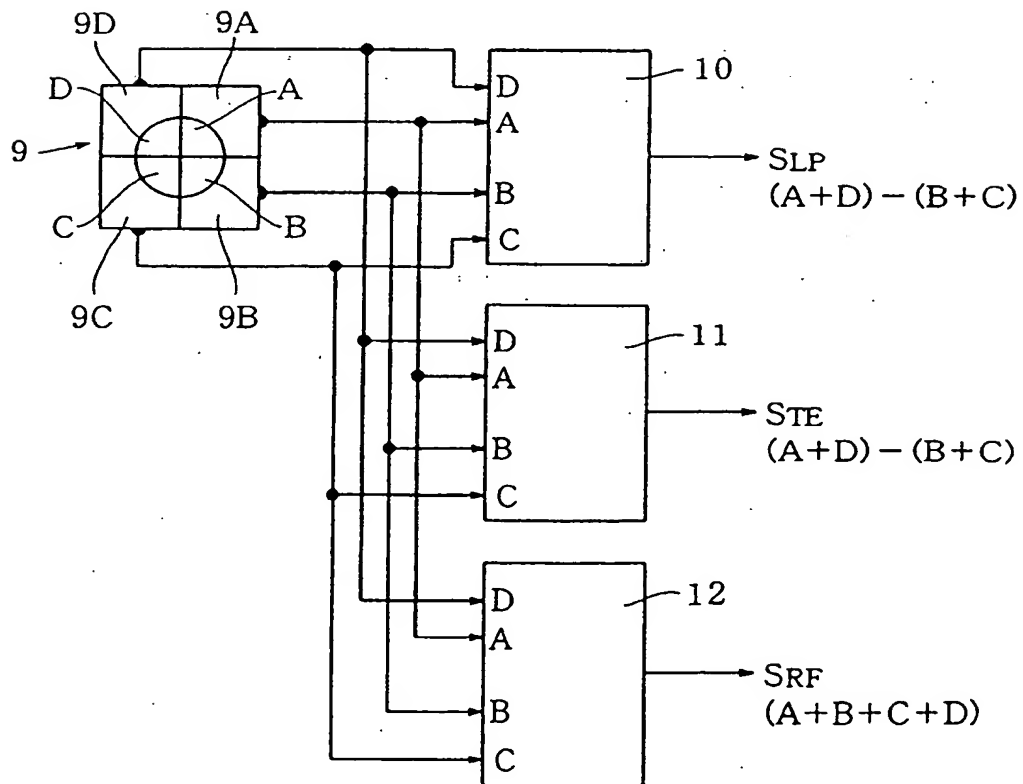


FIG.3 a

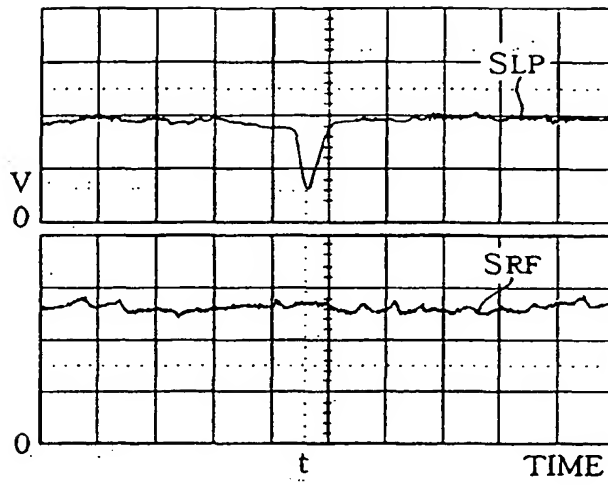


FIG.3 b

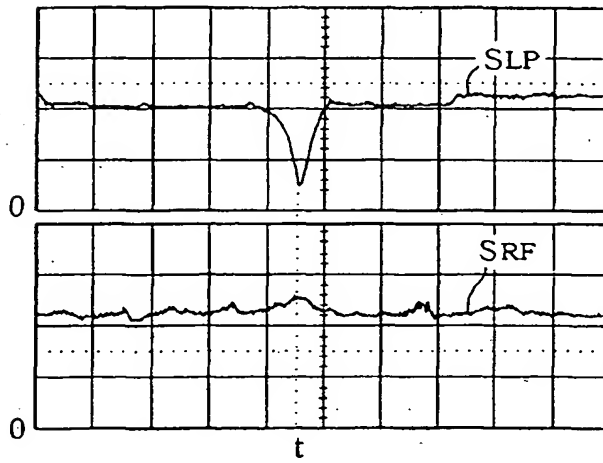


FIG.3 c

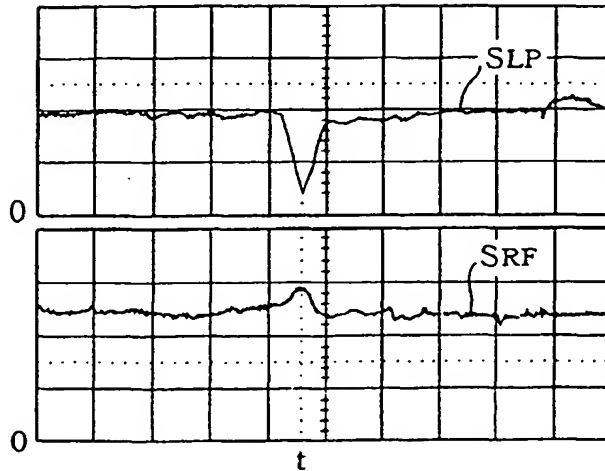


FIG.4 a

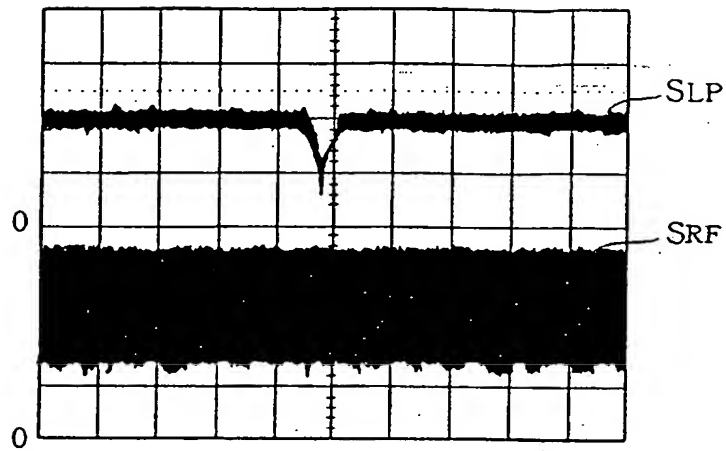


FIG.4 b

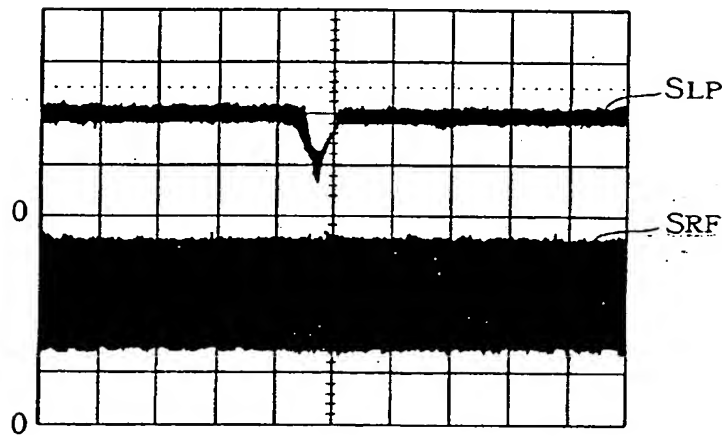


FIG.4 c

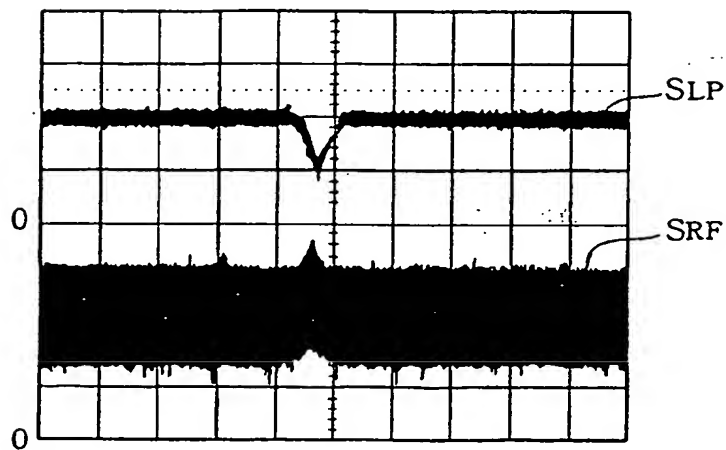


FIG.5

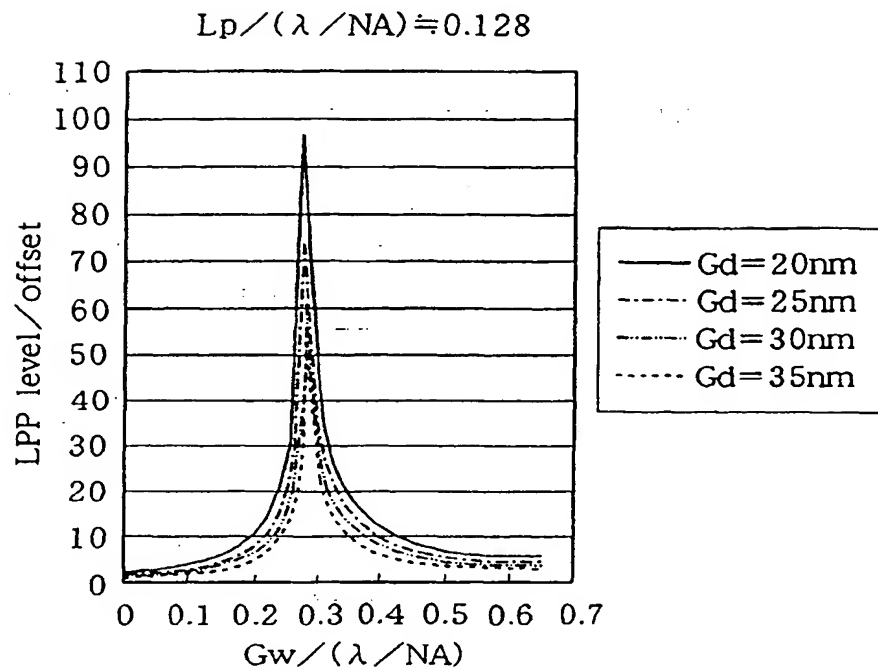


FIG.6

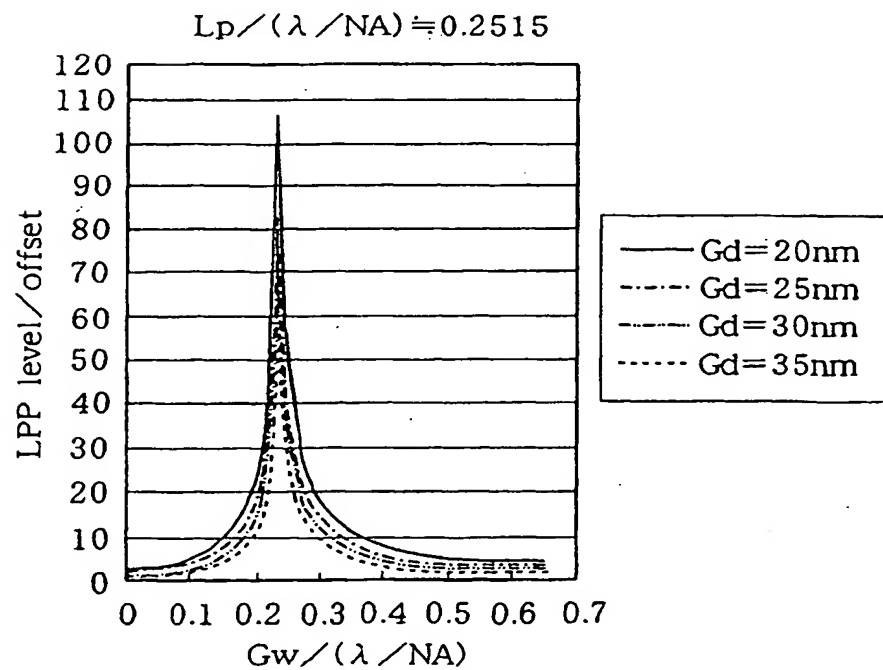


FIG.7

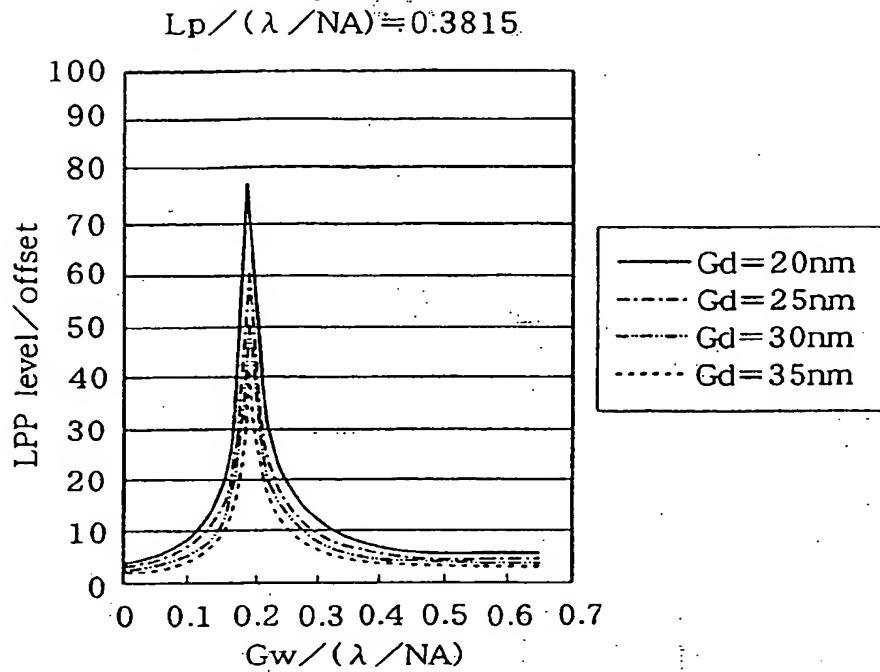


FIG.8

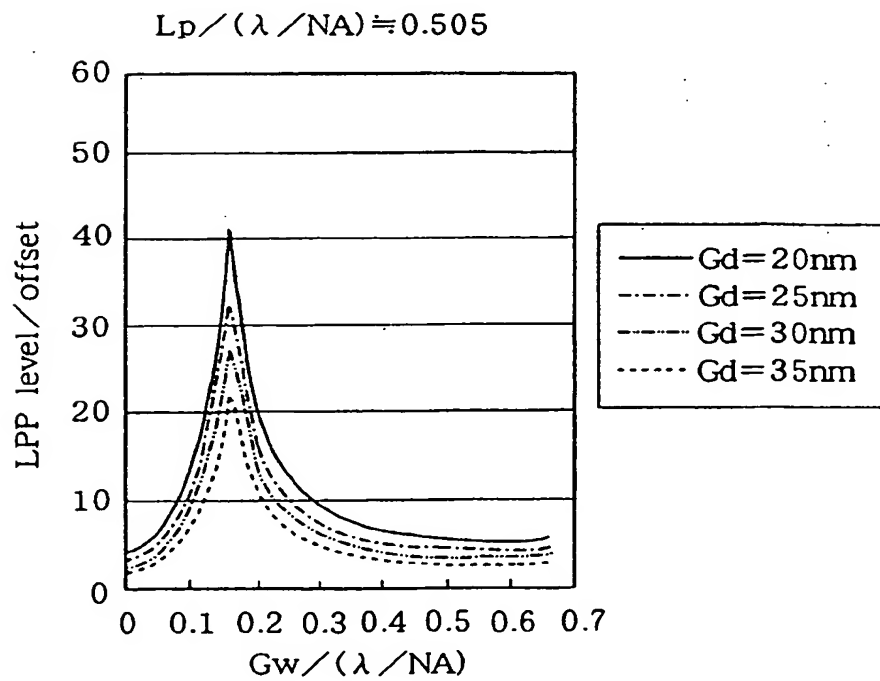


FIG.9

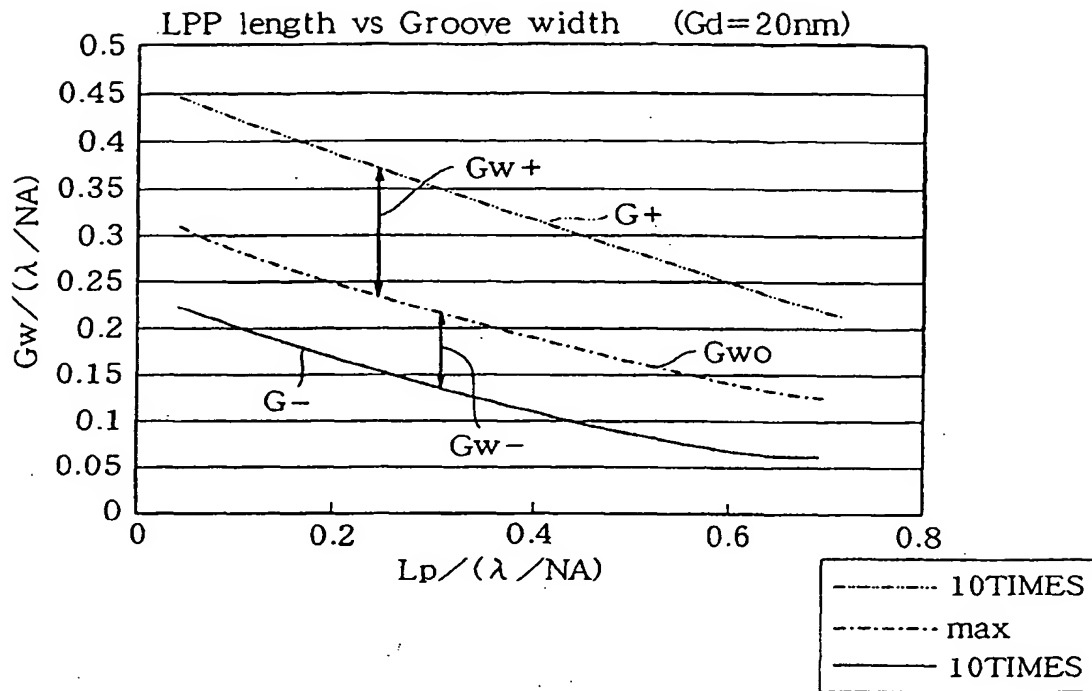


FIG.10

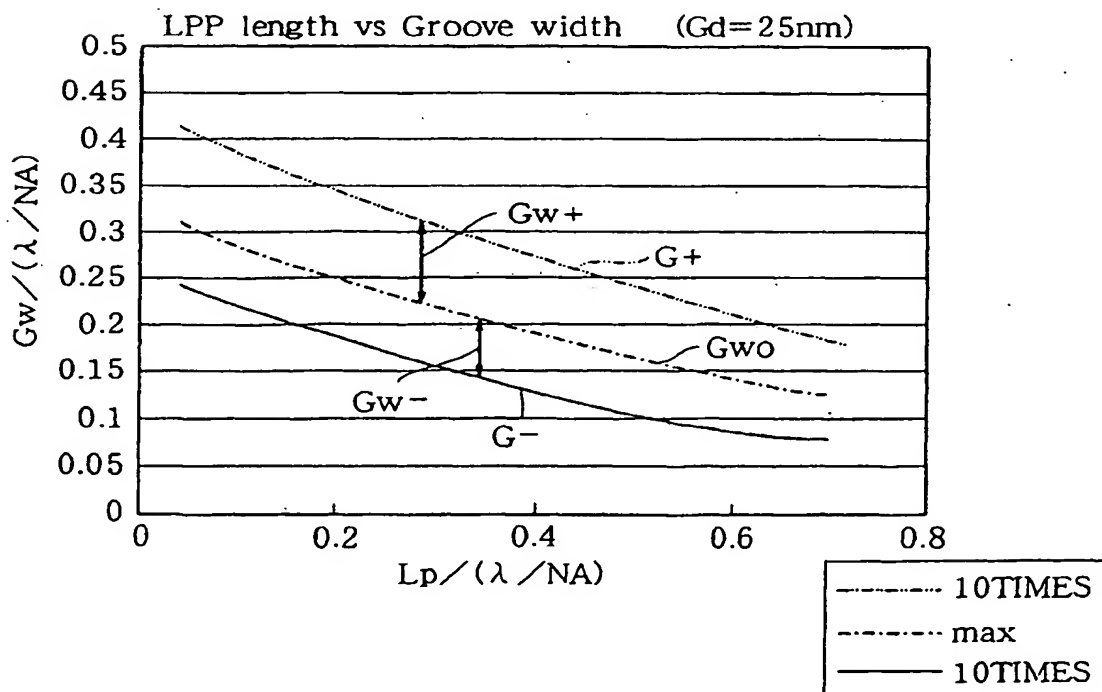


FIG. 11

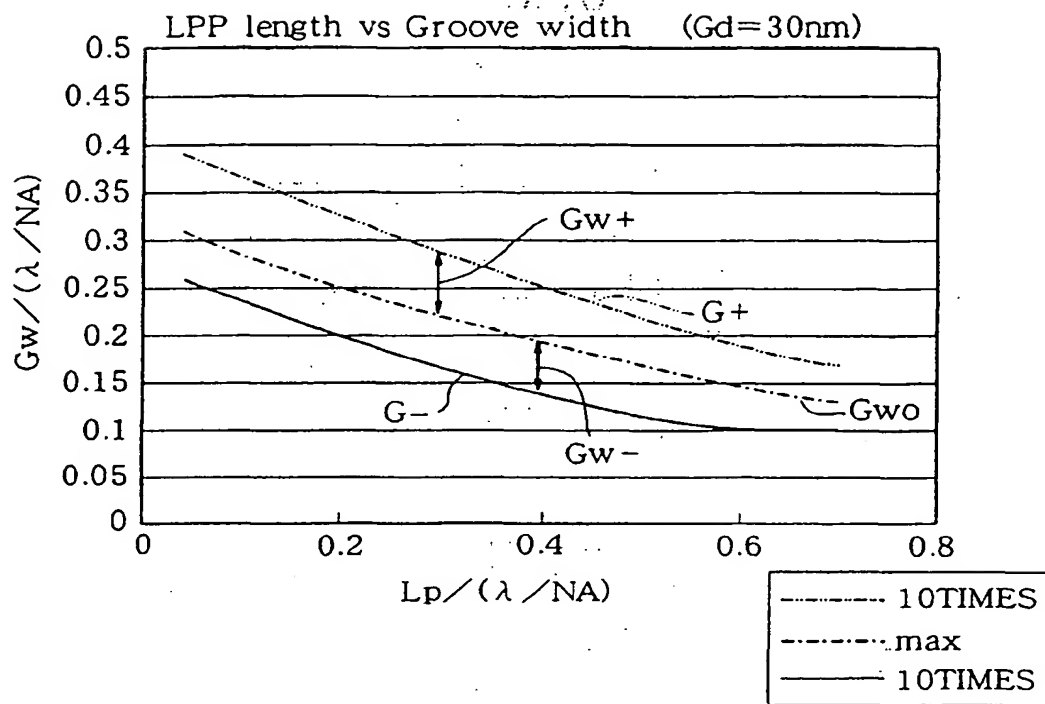


FIG. 12



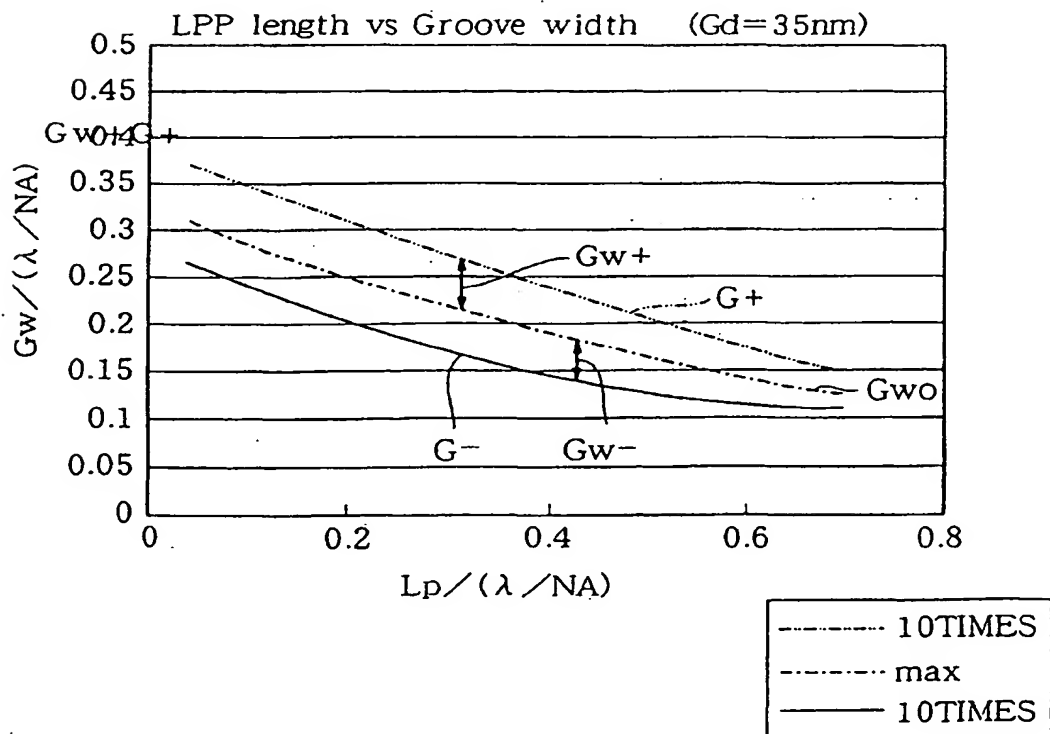


FIG.13



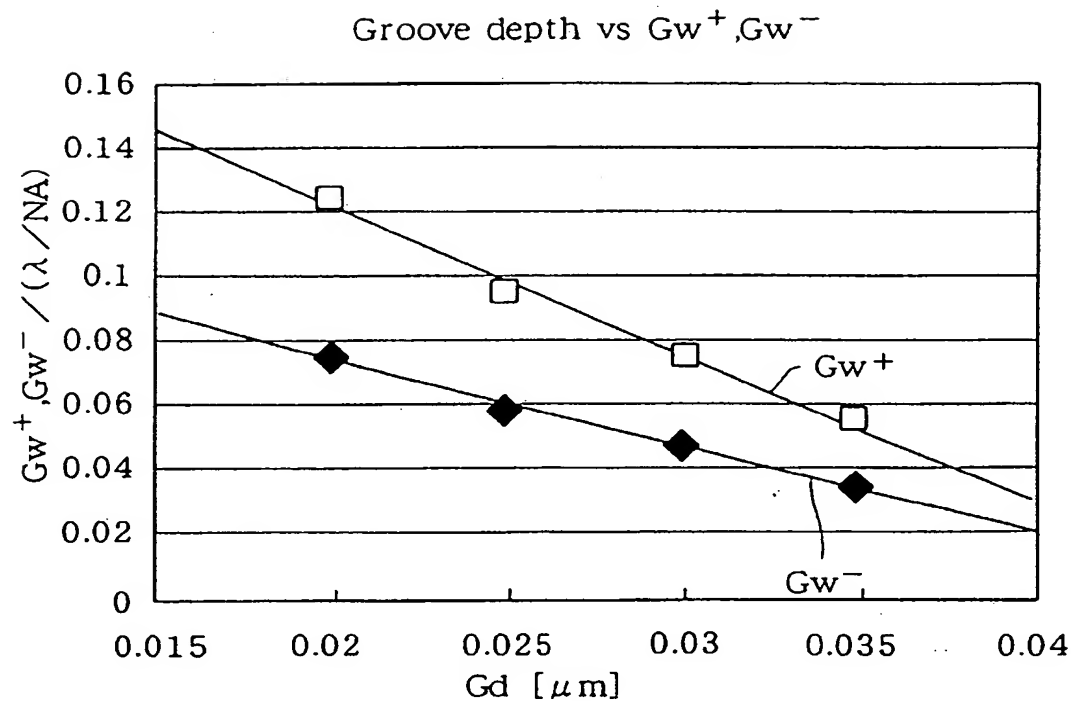

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 996 118 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
25.07.2001 Bulletin 2001/30

(51) Int Cl.7: **G11B 7/007, G11B 7/013,
G11B 27/19**

(43) Date of publication A2:
26.04.2000 Bulletin 2000/17

(21) Application number: 99121065.9

(22) Date of filing: 21.10.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Kato, Masahiro,
c/o Tokorozawa Koujou, Pioneer Corp
Tokorozawa-shi, Saitama-ken 359-0047 (JP)
- Sato, Makoto,
c/o Sougoukenkyusho, Pioneer Corpor.
Tsurugashima-shi, Saitama-ken 350-2201 (JP)

(30) Priority: 23.10.1998 JP 30196598

(71) Applicant: Pioneer Corporation
Meguro-ku, Tokyo (JP)

(74) Representative: Sajda, Wolf E., Dipl.-Phys. et al
MEISSNER, BOLTE & PARTNER
Postfach 86 06 24
81633 München (DE)


(72) Inventors:
• Muramatsu, Eiji,
c/o Tokorozawa Koujou, Pioneer Corp
Tokorozawa-shi, Saitama-ken 359-0047 (JP)

(54) **Recording medium and a recording system for the recording medium**

(57) A recording medium has a circular substrate (4), grooves (1) formed in the substrate (4), lands (2) formed between the grooves (1), a plurality of land pre-pits (3) formed between the grooves (1). The respective grooves (1) and the land pre-pits (2) are formed so as to satisfy particular relationships between the width of the


groove (1), the length of the land pre-pit (3) in a radial direction of the substrate (4), the wave length of light used in a system for recording information on the recording medium, and the numerical aperture of an objective (8) in the system for accurate recording and reproduction.

FIG.1 a

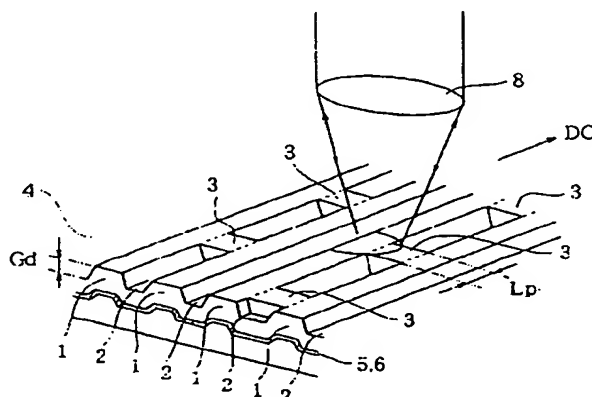

EP 0 996 118 A3

FIG.1 b

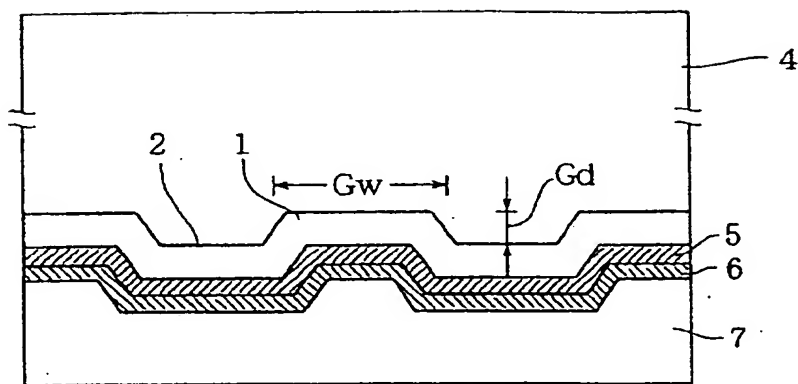



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 1065

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A,D	EP 0 751 506 A (PIONEER ELECTRONIC CORP) 2 January 1997 (1997-01-02) * the whole document *	1-4	G11B7/007 G11B7/013 G11B27/19
A,P	EP 0 926 664 A (TOKYO SHIBAURA ELECTRIC CO) 30 June 1999 (1999-06-30) * abstract *	1-4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G11B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 May 2001	Examiner Poth, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P0-C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 99 12 1065

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-05-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0751506 A	02-01-1997	JP 9017029 A US 6181657 B	17-01-1997 30-01-2001
EP 0926664 A	30-06-1999	JP 11259868 A	24-09-1999

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82